




# edilgru

International s.r.l.

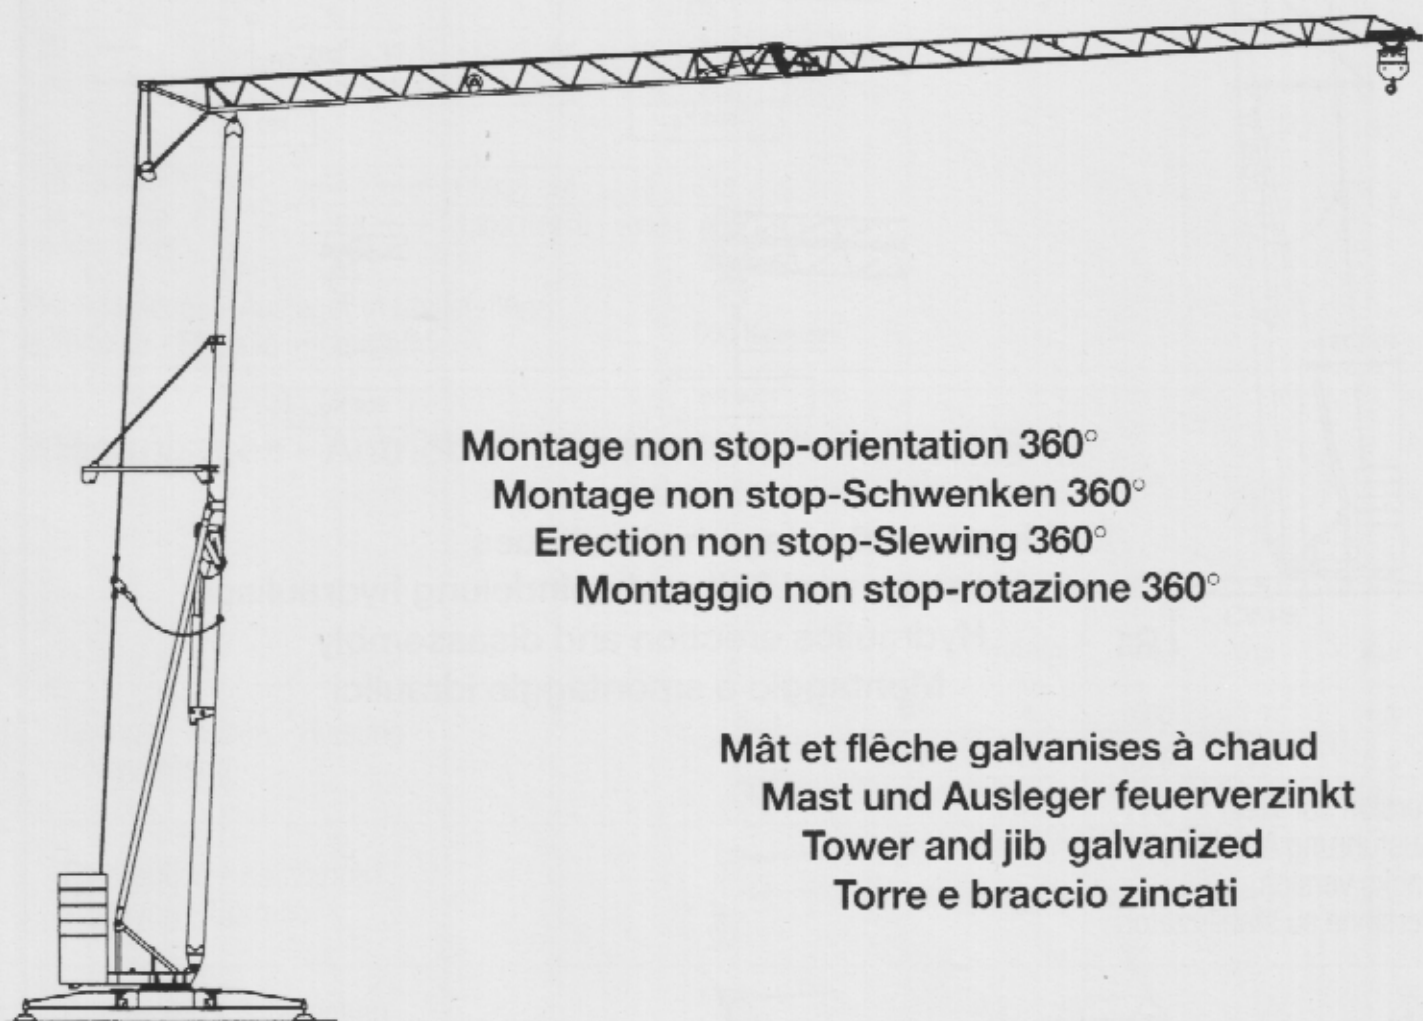


Montage non stop-orientation 360°  
Montage non stop-Schwenken 360°  
Erection non stop-Slewing 360°  
Montaggio non stop-rotazione 360°

Mât et flèche galvanisés à chaud  
Mast und Ausleger feuerverzinkt  
Tower and jib galvanized  
Torre e braccio zincati

## M.H. - TURBO 22




# M.H. - TURBO 22

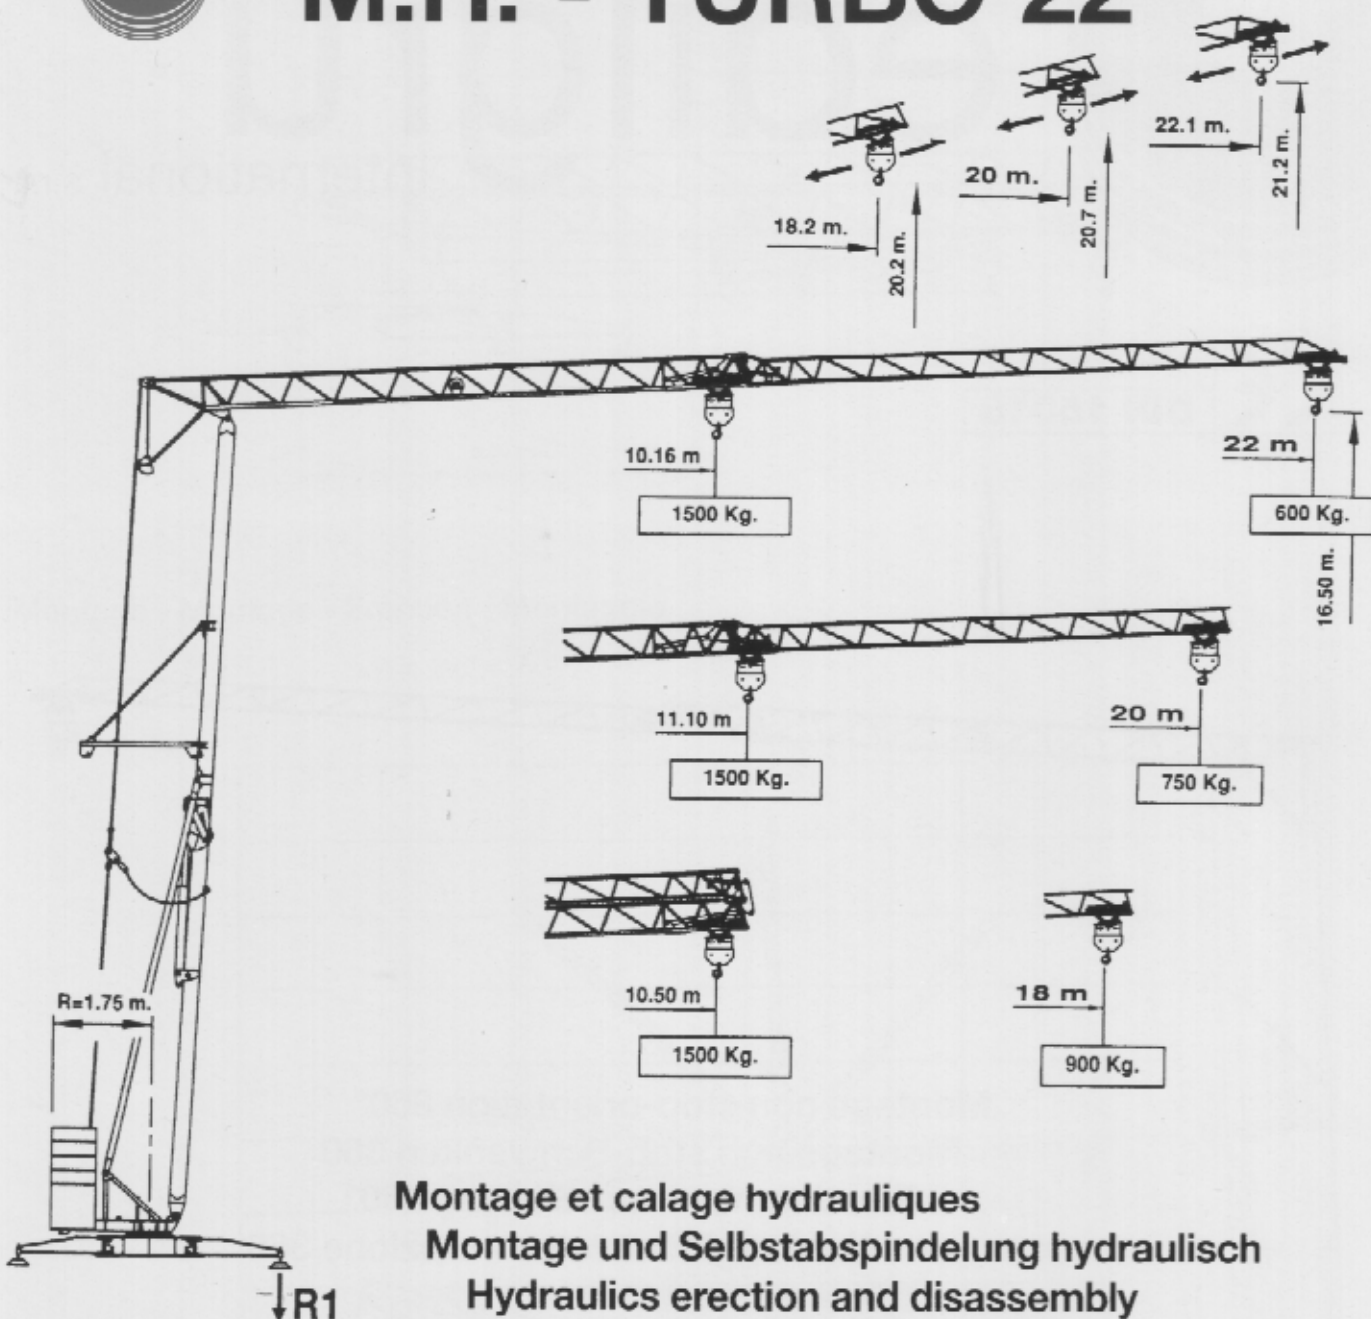

Montage et calage hydrauliques  
 Montage und Selbstabspindelung hydraulisch  
 Hydraulics erection and disassembly  
 Montaggio e smontaggio idraulici

Version sur vérin  
 Ausführung Abstützspindeln  
 Jacks version  
 Versione su stabilizzatori

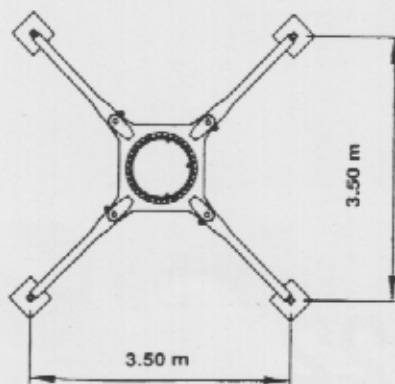

# Réactions - Eckdrücke - Reactions - Reazioni

R1

8800 da N

6000 da N

● En service  
■ Hors service

● Im Betrieb  
■ Ausser Betrieb

● In service  
■ Out of service

● In servizio  
■ Fuori servizio


Poids de construction sans essieux - Konstruktionsgewicht ohne transportachse  
Dead weight without transport axles - Peso della gru senza assali

Kg 5400


Poids du lest - Ballastgewicht - Ballast weight - Peso zavorra rotante

Kg 9600


## Courbes de charges - Lastkurven - Load curves - Curve di carico



|       |      |      |     |     |     |     |    |
|-------|------|------|-----|-----|-----|-----|----|
| 10,16 | 12   | 14   | 16  | 18  | 20  | 22  | m  |
| 1500  | 1230 | 1025 | 875 | 762 | 672 | 600 | Kg |



|   |      |      |      |     |     |     |    |
|---|------|------|------|-----|-----|-----|----|
| → | 11,1 | 12   | 14   | 16  | 18  | 20  | m  |
| → | 1500 | 1370 | 1140 | 975 | 850 | 750 | Kg |



|   |   |       |      |      |     |    |
|---|---|-------|------|------|-----|----|
| → | → | 11,63 | 14   | 16   | 18  | m  |
| → | → | 1500  | 1210 | 1033 | 900 | Kg |

Flèche relevée - Ausleger in Steilstellung  
Luffing jib - Braccio impennato

600 Kg cost.

## Mécanismes - Antriebe - Mechanisms - Meccanismi

|                                                   |  |  | m/min.                                      | Kg   | CV-PS<br>hp          | Kw  |
|---------------------------------------------------|--|--|---------------------------------------------|------|----------------------|-----|
| Levage - Heben - Hoisting<br>Sollevamento         |  |  | 4                                           | 1500 | 1,75                 | 1,3 |
|                                                   |  |  | 17                                          | 1500 | 7,5                  | 5,5 |
|                                                   |  |  | 34                                          | 700  | 7,5                  | 5,5 |
| Distribution - Katzfahren<br>Trolleyng - Carrello |  |  | 22                                          |      | 1,5                  | 1,1 |
| Orientation - Schwenken<br>Slewing - Rotazione    |  |  | 0,2 / 0,95<br>tr/min - U/min<br>rpm - g/min |      | 2,5<br>da N m<br>Kgm |     |

Puissance électrique nécessaire  
Anschlusswert  
Necessary electric power  
Potenza elettrica necessaria

380 V  
50 Hz




Réseau - Netzstrom  
Mains supply - Potenza

10 Kw


Groupe électrogène  
Stromaggregat  
Generator set  
Gruppo elettrogeno

Nous consulter  
Auf anfrage  
Consult us.  
Consultarci

Mode de transport - Transportart - Kind of transport - Soluzione di traino

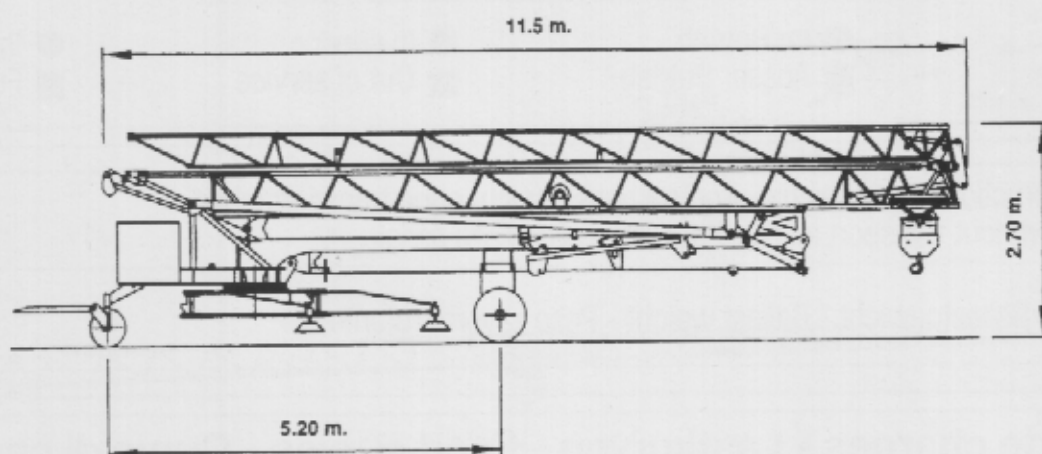

Montage - Montage - Erection - Montaggio

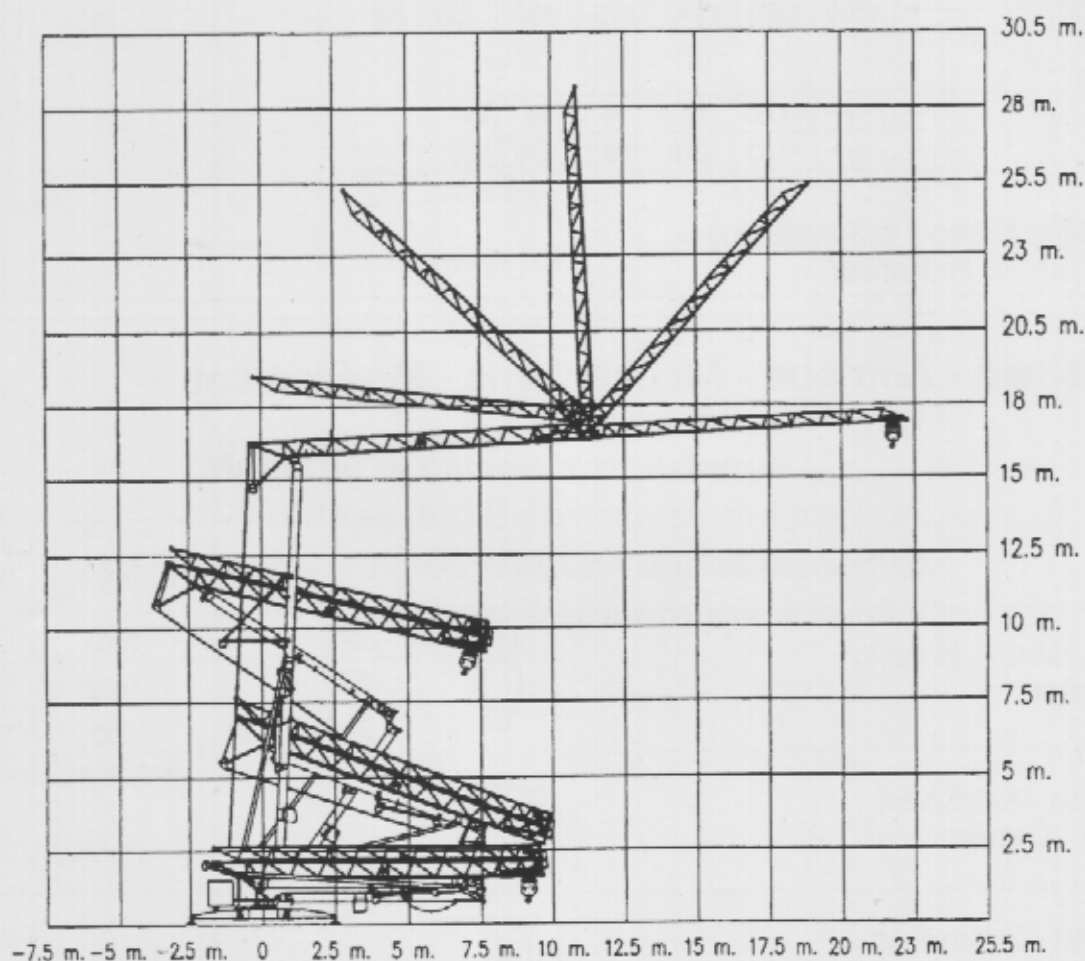

**edilgru**  
International s.r.l.

sede legale  
26015 Soresina (CR) Via Genala, 48  
stabilimento: via Muzio da Soresina, snc  
Tel. 0039-0374-344391  
(2 linee ISDN ric. automatica)  
Fax 0039-0374-341541  
2 fax collegati 24 ore su 24  
e-mail: info@edilgru.com - ww.edilgru.com