


GRU 1350-40 IDRAULICA AUTOMONTANTE

GMR

montaggio rapido
schnellmontage
montage rapide
speedy mounting
montaje rapido

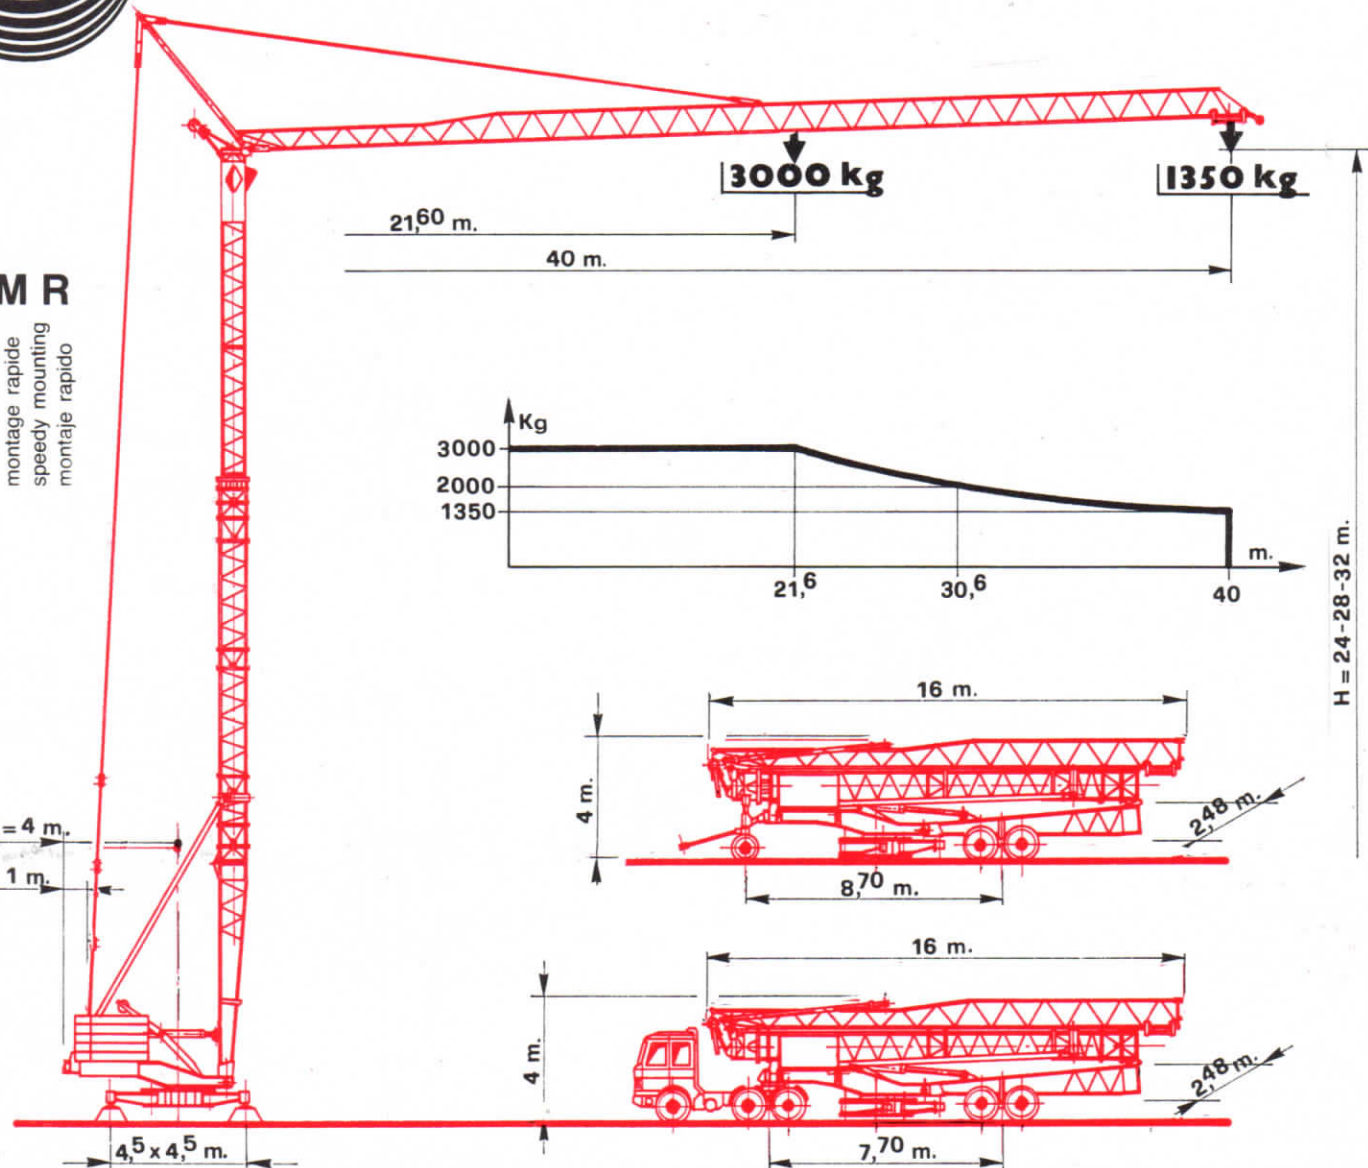

H = 24-28-32 m.

NB! La variazione delle altezze avviene con braccio orizzontale

edilgru spa

sede e stabilimento
26015 soresina - via guida
tel. 0374/40391 - 4 linee ric. aut.
EDILGRU - SORESINA
telex 312088 edigr

MOVIMENTO BEWEGUNG MOUVEMENT MOTIONS MOVIMIENTO	VELOCITA GESCHWINDIGKEIT VITESSE SPEED RATE VELOCIDAD	POTENZA KRAFTBEDARF PUISSANCE RATING POTENCIA HP - PS - CV	DATI TECNICI TECHNISCHE DATEN DONNEES TECHNIQUES TECNICAL DATA DATOS TECNICOS
Sollevamento Heben Levage Hoisting Elevacion	 3000 3000 1350 KG 6 25 50 m/m	22/22/22 Kgm.	Potenza totale richiesta Kraftbedarf Puissance electrique necessaire Necessary electric power Potencia total necesaria Kv KVA 25 kva KW kw
Carrello Katzfahren Chariot Jib trolley Carrillo	20/40 m/m'	5/5	Corrente trifase Drehstrom Courant triphase Main supply Corriente trifasica 380 v periodi Hz 50 periodes cycles Hz
Rotazione Drehen Orientation Slewing Rotacion	da 0 a 0,2/0,5/0,9 g/m' Upm l/m rpm	2 x 4,5 Kgm	Contrappeso Gegengewicht Contrepoids Counterweight Lastre de contrapeso 28 ton
Traslazione Fahren Translation Travelling Traslacion	27 m/m'	2x3	Peso gru senza zavorra Konstruktionsgewicht ohne ballast Poids de la grue sans lest Weight of the crane without ballast Peso de la grua sin lastre - 28,3 ton