

GRU A TORRE

GA 724 | **2000**

GRU AUTOMATICA CON
MONTAGGIO IDRAULICO

GA compact



GX



GH city crane



GHS topless



FB F.lli Butti s.r.l.

Via XXV Aprile, 58


23868 Valmadrera (LC) - Italia

Tel. 0341.581108 - Fax 0341.200253

E-mail : fbgru@fbgru.it - <http://www.fbgru.it>



FEM 1.001 - A3
EN 14439 - C25

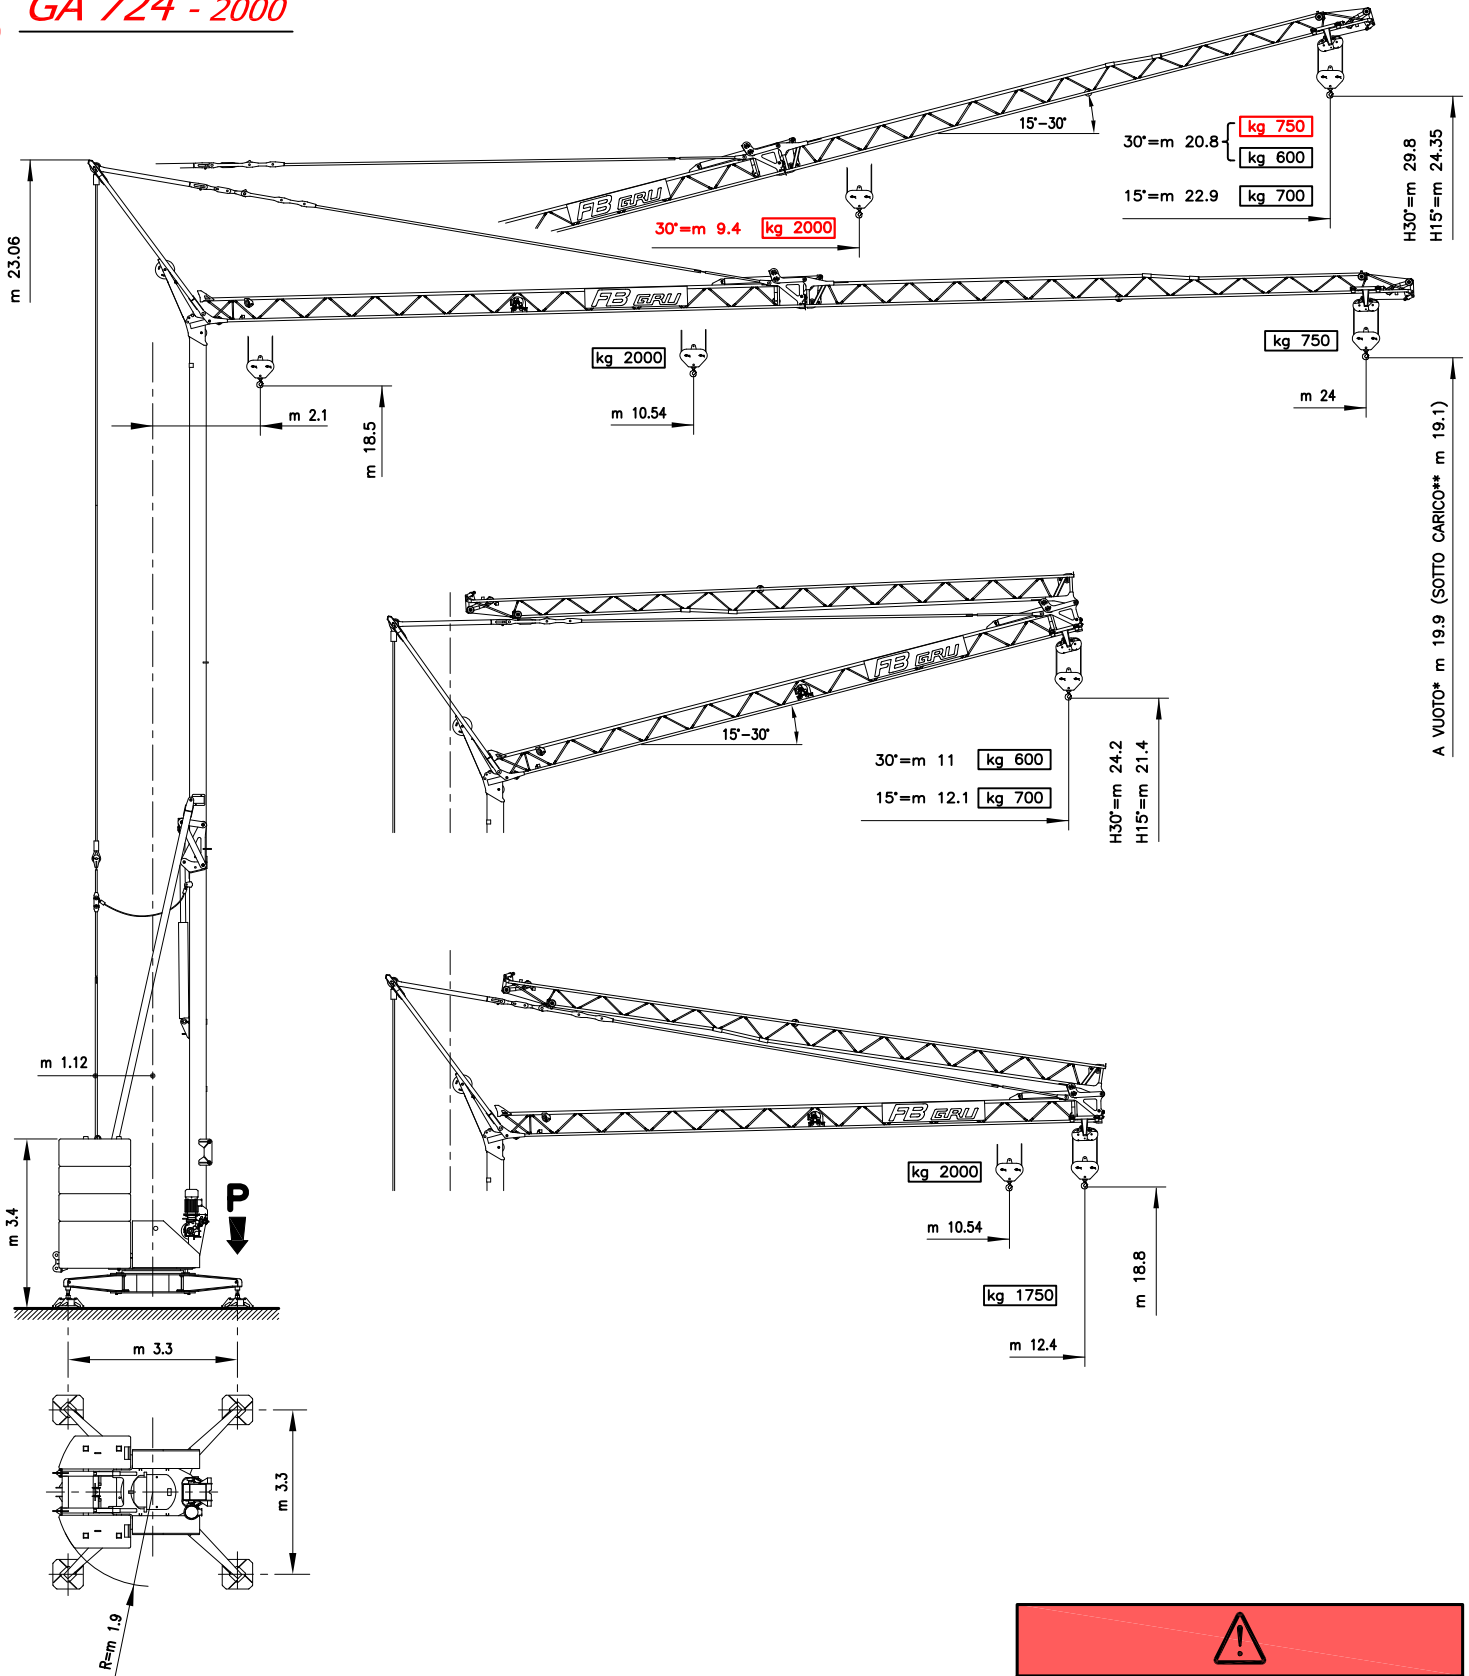

* SIN CARGA ** CARGADO
 OFF-LOAD LOADED
 UNBELASTET BELASTET
 A VIDE EN CHARGE

In rosso valori configurazione con dispositivo per 30°
 In red, configuration values with device for 30°
 In Rot, Konfigurationswerte mit Einrichtung für 30°
 En rouge les valeurs de configuration avec dispositif pour 30°

P	
<p>kg 13050</p> <p><i>In servizio</i></p> <p>En servicio In service In betrieb En service</p>	<p>kg 10500</p> <p><i>Fuori servizio</i></p> <p>Fuera de servicio Out of service Außer betrieb Hors service</p>

<p>N° 6x1519 N° 2x2620</p> <p>kg 22004</p>	<p>kg 7650</p>

MOVIMENTO MOVIMIENTO MOVEMENT BEWEGUNG MOUVEMENT	ALIMENTAZIONE ALIMENTACION OPERATING VOLTAGE BETRIEBSSPANNUNG TENSION DE SERVICE	PRESTAZIONI FUNCIONAMIENTOS PERFORMANCES LEISTUNGEN EXÉCUTIONS	
---	---	---	--

		1 ^a m/1' - kg	2 ^a m/1' - kg	3 ^a m/1' - kg	4 ^a m/1' - kg	kW 9.2
SOLLEVAMENTO ELEVACION – HOISTING HEBEN – LEVAGE INVERTER	230 - 400 V 50 Hz	4	12	20		
		2000	2000	750		
	400 V	4	24	37	46	
		2000	2000	750	600	

		1 ^a m/1'	2 ^a m/1'	3 ^a m/1'	kW 2.2
CARRILLO CARRILLO – JIB TROLLEY LAUFKATZE – DISTRIBUTION INVERTER	230 - 400 V 50 Hz	19	30	54	

		1 ^a g/1'	2 ^a g/1'	3 ^a g/1'	kW 2.2
ROTAZIONE ROTACION – SLEWING DREHEN – ORIENTATION INVERTER	230 - 400 V 50 Hz	0 → 0.15	0.15 → 0.60	0.60 → 0.85	



Conforme alle direttive
CEE sul livello acustico
2000/14/CE

Conforme con las directivas
CEE sobre el nivel acustico

In compliance with the EEC
instructions on noise levell

Gemass EWG-Richtlinien für
den Schall-Leistungspegel

Conforme aux directives CEE
sur le niveau acoustique

CURVE DI CARICO

CURVAS DE CARGAS – LOAD DIAGRAMS LASTKURVEN – COURBES DE CHARGES

V24

	m	2.1	5	10.5	11	12	13	15	17	19	21	22	23	24
	kg	2000			1907	1720	1565	1321	1138	996	883	834	790	750

	m	2.1	5	7	9	11	13	15	17	19	20	21	22	22.9
	kg	700												

	m	2.1	5	7	9	11	13	15	16	17	18	19	20	20.8
	kg	600												

	m	2.1	5	7	9.4	11	13	15	16	17	18	19	20	20.8
	kg	2000				1790	1462	1229	1055	919	863	811	765	750



POTENZA RICHIESTA

POTENCIA-ELECTRICA NECESARIA – NECESSARY ELECTRIC POWER KRAFTBEDARF – PUISSANCE ELECTRIQUE NECESSAIRE

	3 kW 230 V - 50 Hz	12 kW 400 V - 50 Hz
--	-----------------------	------------------------



TRASPORTO TRANSPORTE – TRANSPORT
TRANSPORT – TRANSPORT

5
km/h

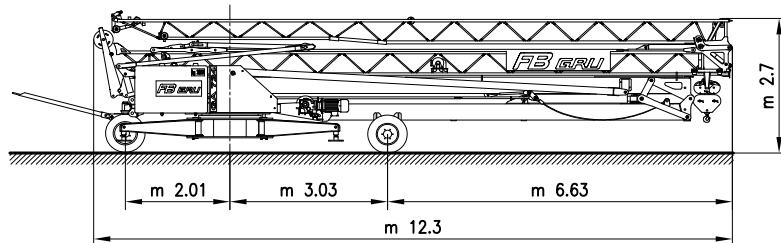

FB25K2

25
km/h

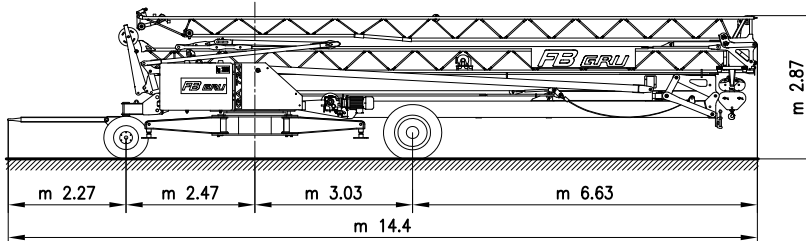

MONTAGGIO MONTAJE – ERECTION
MONTAGE – MONTAGE

